

DATA SHEET


AR + AR VIS-IR COATING

AR Coated Borosilicate Glass

Thickness 1.10mm

Specification: AR + AR (400-10000 nm) $T_{avg} > 97\%$ (400-1000nm)

AOI-0 degrees

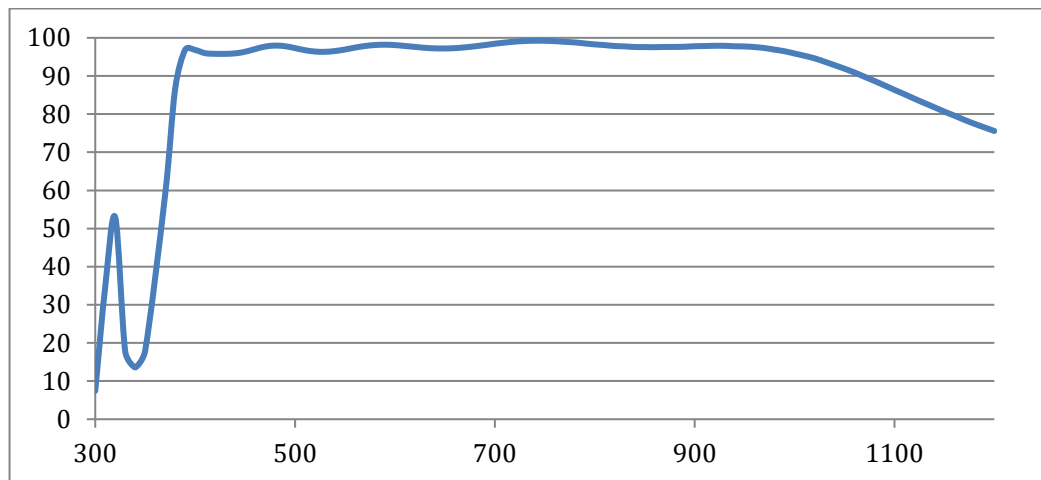

NM	T%	NM	T%	NM	T%	NM	T%	NM	T%
300	7.445	500	97.304	700	98.456	900	97.798	1100	86.351
310	34.769	510	96.756	710	98.752	910	97.85	1110	85.219
320	52.936	520	96.405	720	99.007	920	97.911	1120	84.039
330	17.802	530	96.332	730	99.167	930	97.906	1130	82.896
340	13.571	540	96.541	740	99.24	940	97.794	1140	81.787
350	18.008	550	96.933	750	99.223	950	97.74	1150	80.65
360	32.188	560	97.435	760	99.127	960	97.574	1160	79.597
370	58.977	570	97.859	770	98.953	970	97.316	1170	78.49
380	86.665	580	98.111	780	98.795	980	96.901	1180	77.469
390	96.855	590	98.19	790	98.526	990	96.478	1190	76.515
400	96.809	600	98.103	800	98.28	1000	95.885	1200	75.575
410	95.975	610	97.862	810	98.094	1010	95.287		
420	95.818	620	97.623	820	97.858	1020	94.623		
430	95.802	630	97.374	830	97.762	1030	93.755		
440	95.924	640	97.238	840	97.597	1040	92.827		
450	96.358	650	97.212	850	97.575	1050	91.914		
460	97.052	660	97.299	860	97.551	1060	90.907		
470	97.702	670	97.499	870	97.604	1070	89.793		
480	97.96	680	97.783	880	97.614	1080	88.686		
490	97.801	690	98.102	890	97.664	1090	87.538		